


MATING HEIGHT	H1	H2
4.00	2.80	1.80
4.50	3.30	1.80
5.00	3.80	1.80
5.50	4.30	2.30
6.00	4.80	2.30
6.50	5.30	2.30
7.00	5.30	2.30

Circuits	Dimensions(mm)	NUMBER OF POSITIONS			
		A	B	C	D
6	2*3	4.30	2.80	1.60	3.40
8	2*4	5.10	3.60	2.40	4.20
10	2*5	5.90	4.40	3.20	5.00
12	2*6	6.70	5.20	4.00	5.80
14	2*7	7.50	6.00	4.80	6.60
16	2*8	8.30	6.80	5.60	7.40
18	2*9	9.10	7.60	6.40	8.20
20	2*10	9.90	8.40	7.20	9.00
30	2*15	13.90	12.40	11.20	13.00
40	2*20	17.90	16.40	15.20	17.00
50	2*25	21.90	20.40	19.20	21.00

Specifications  
 Current Rating:0.5Amp  
 Insulation Resistance:500MΩ/Min.  
 Dielectric Withstanding Voltage:200VA  
 Contact Resistance:20mΩ/Max.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon9T  
 or the equivalent material  
 PART NO. DESCRIPTION:  
 CBT-0810XXM-XX

MATING HEIGHT  
 40=4.0MM MATING HEIGHT  
 NUMBER OF POSITIONS

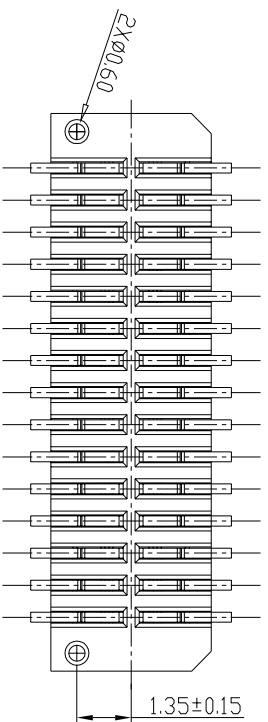

**CSCONN**

GENERAL TOLERANCE  
 X. ±0.5°  
 Y. ±0.3  
 Z. ±0.2  
 XX. ±0.1  
 XXX. ±0.5°

**CSCONN PRECISE ELECTRONICS CO.,LTD**  
 TITLE: BTB 0.8MM XP MALE H=XXMM 单槽

DWG NO. BTB



SCALE SHEET REV  
 1:1 1 OF 1 A

E

D

C

B

A

E

D

C

B

A