

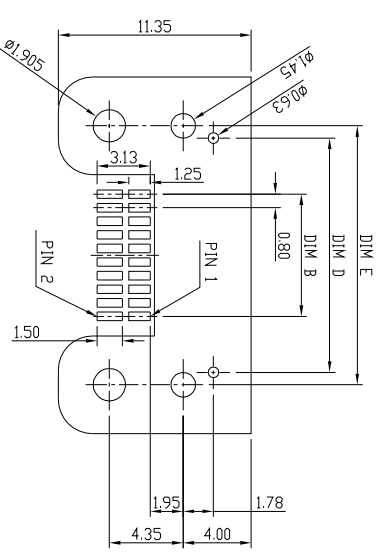
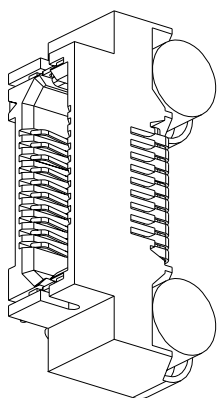
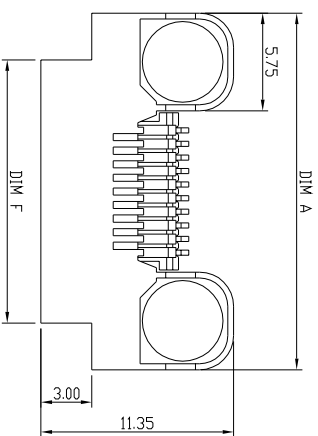




RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05


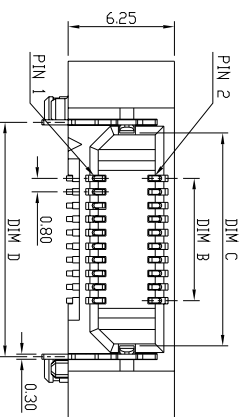


NOTES:

- MATERIAL:
1.HOUSING:THERMO-PLASTIC, UL 94V-0 MATURE
2.CONTACT:PHOSPHOR BRONZE
CONTACT:SEE ORDER INF ORMATION;
3.LOCKING CLIP:
MATTE TIN CONTACT AND TAIL

- ELECTRICAL:
1.CURRENT RATING:23A-58.7 PER POWER BLADE
2.WITHSTANDING VOLTAGE:600V AC for 1 min
3.CONTACT RESISTANCE:50mΩ MAX
4.INSULATION RESISTANCE:1000MΩ MIN

- ENVIRONMENTAL:
1. OPERATING TEMPERATURE:-55°C TO +125°C.

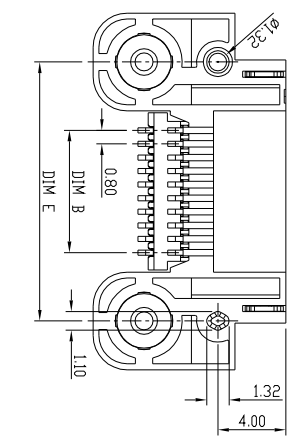

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCES		PART NO.(INTENDED USE) CBT-0831XXF-63		TITLE: BTB 0.8MM XP FEMALE 侧插	
X. ° ±5°	0.X±0.25	APPD:		DWG NO. BTB	
X. 1±2°	0.XX±0.2	CHKD: Skila		SCALE	
X. ±1°	0.XX±0.1	DR: Kitty		SHEET	
				1 OF 1	
				REV	
				A	