


P. C. B LAYOUT
TOP VIEW

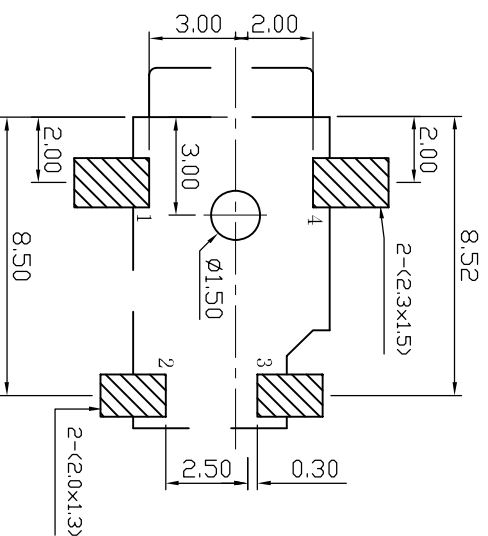

- SPECIFICATION**
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $> 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
4	CONTACT FOOT	1	PHOSPHOR BRONZE	Cu-Sn-Plating
3	PIN	1	PHOSPHOR BRONZE	Cu-Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Cu-Sn-Plating
1	HOUSING	1	PA46	

UNITS: mm	CSCONN	SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD
------------------	---------------	---

GENERAL TOLERANCE	PART NO.(INTENDED USE)	TITLE: DC JACK
X. ° ±5°	CDC-085	DWG NO. JACK
X. 1±2°	APPD:	SCALE 1:1
XX. ±1°	CHKD: Skila	SHEET 1 OF 1
XXX. ±0.5°	DR: Kitty	REV A



E
D
C
B
A

1 2 3 4 5 6 7 8

E
D
C
B
A