


Nano SIM Circuit Description:

PIN No.	FUNCTION
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

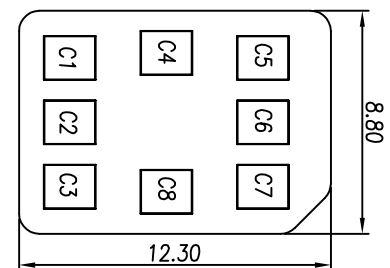

REFERENCE PCB LAYOUT
TOLERANCE: ±0.05

- NOTES:
1. MATERIAL:
 - 1.1 Housing:High Temperature Thermoplastic
 - 1.2 Terminal:Copper Alloy
 - 1.3 Shell:Stainless Steel
 2. SPECIALTY:
 - 2.1 Rated current:0.5A
 - 2.2 Rated voltage:30V
 - 2.3 Contact Resistance:50mΩ MAX
 - 2.4 Insulation Resistance:1000MΩ MIN 500V DC
 - 2.5 Dielectric withstanding voltage: 500V AC.
 - 2.6 Solder ability:245±5°C, 5±0.5s.
 - 2.7 Durability:5000 Cycles Min.
 - 2.8 Operating condition:temperature-40°C~+85°C; Humidity 80% R.H MAX

CIRCUIT	
Inserted Card	
C5 Detect	
Withdrawal Card	
C5 Detect	

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE:		PART NO.(INTENDED USE)		TITLE:	
X. ° ±5°	0.X ±0.25	CST106071403003		NANO SIM CARD 7P H=1.4MM 抽屜式	
X.1 ±2°	0.XX ±0.2	APPD:		DWG NO.	
XX ±1°	0.XXX ±0.1	CHKD: Skilla		STM CARD	
		DR: Kitty		SCALE SHEET REV	
				1:1 1 OF 1 A	