
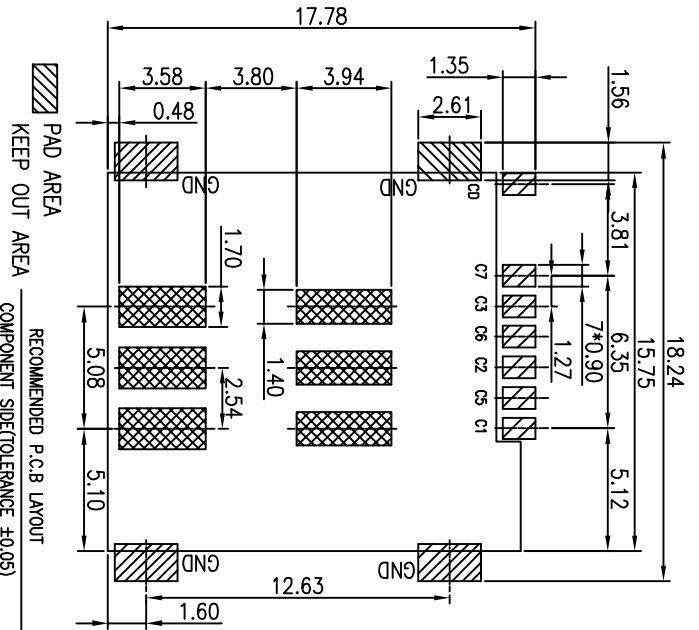



SCALE 1:2

- NOTES:
- SPECIALTY:
 - Rated current:1.0A
 - Rated voltage:50V
 - Contact Resistance:50mΩ MAX
 - Insulation Resistance:1000MΩ MIN 500V DC
 - Dielectric withstanding voltage: 500V AC.
 - Solder ability:250±5°C, 5±0.5s.
 - Durability:1500 Cycles Min.
 - Operating condition:temperature:-40°C~+85°C, Humidity 80% R.H MAX
 - PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



NO	Description	Dosage	Material	Color/plating
1	Housing	1PC	H-TMP THERMOPLASTIC	Color/plating
2	Data Contact	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
3	CD Switch	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
4	Shell	1PC	STEEL	SMT AREA:GOLD PLATED
5	Slide	1PC	H-TMP THERMOPLASTIC	UL94V-0 BLACK
6	SPRING	1PC	SWP-B	PLATE WITH NICKEL
7	LINK	1PC	STEEL	PLATE WITH NICKEL

CSCONN
 CS107127150005
 CS CONN PRECISE ELECTRONICS CO.,LTD

CSCONN
 PART NO.(INTENDED USE)
 CS107127150005
 TITLE: MICRO SIM CARD 7P PUSH 1.5H 外挿式

UNITS: mm
 GENERAL TOLERANCE
 X. ±0.25
 X.1 ±0.2
 X.X ±0.1

APPD: Sk11a
 CHKD: Sk11a
 DR: Kitty

DWG NO. SIM CARD
 SCALE 1:1
 SHEET 1 OF 1
 REV A