

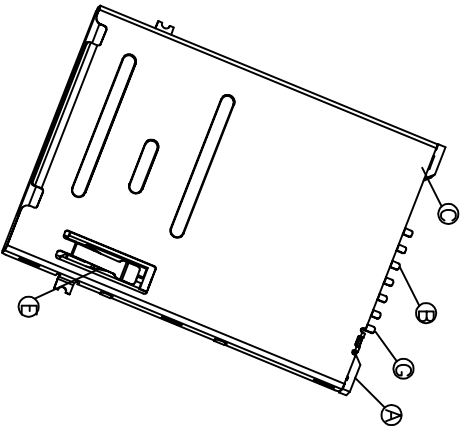
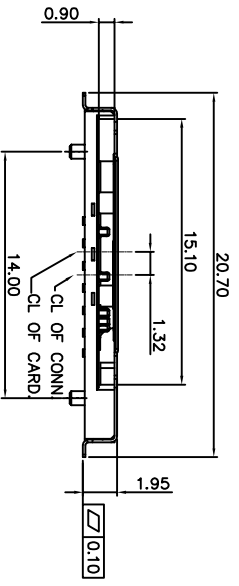
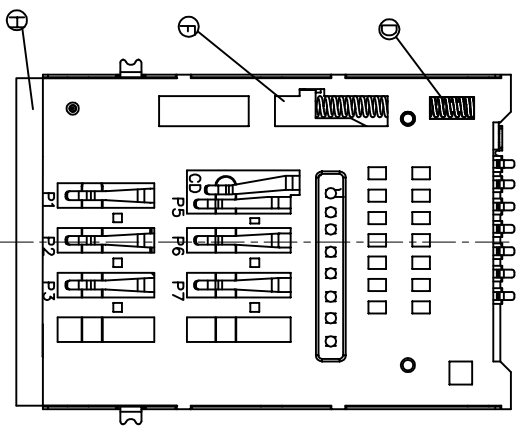
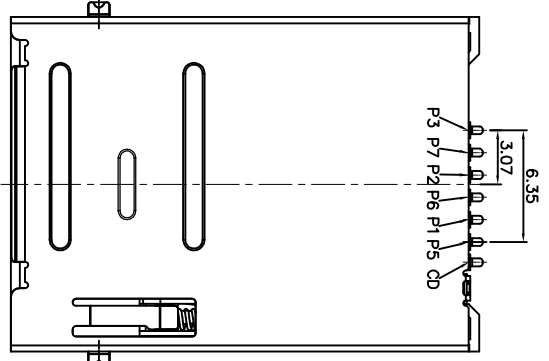
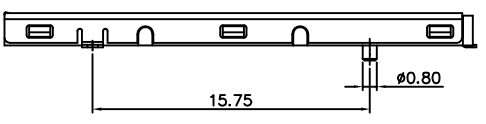


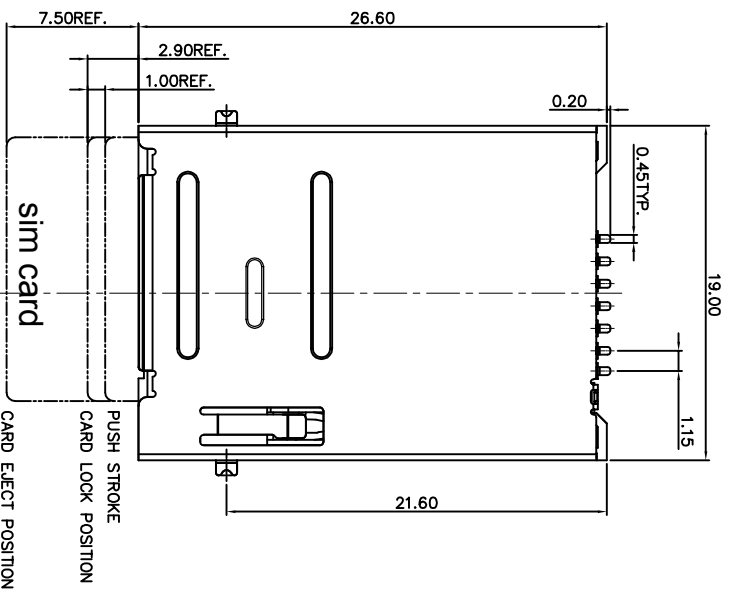



1. Material:
  - 1.1 Insulator: HIGH TEMP. PLASTIC, rated UL94V-0,color:black.
  - 1.2 Terminal: Copper Alloy,Tin 100u" Min. at Solder Tail,Selected Gold on Contact Area Plating.
  - 1.3 Terminal: Copper Alloy,Tin 100u" Min. at Solder Tail,Selected Gold on Contact Area Plating.
  - 1.4 Shell: Stainless Steel.
2. Mechanical and Electrical performance:
  - 2.1 Mating Cycles: 5000 cycles(speed:400~600 cycles/h).
  - 2.2 Rating current:0.5A Max.
  - 2.3 Insulation resistance: 100MΩ Min. at 500 V DC.
  - 2.4 Terminal contact resistance: 100mΩ Max.
  - 2.5 Withstanding voltage:500V AC at 1mA Max. for 1 minute.
3. Environment performance:
  - 3.1 Operating temperature: -40℃~ +85℃
  - 3.2 Storage temperature: -40℃~ +85℃

| UNITS: mm         |  | CSCONN                 |  | CSCONN PRECISE ELECTRONICS CO.,LTD |  |
|-------------------|--|------------------------|--|------------------------------------|--|
| GENERAL TOLERANCE |  | PART NO.(INTENDED USE) |  | TITLE:                             |  |
| X. ° ±5°          |  | CS107266019003         |  | SIM CARD SOCKET 7P PUSH PUSH 1.95H |  |
| X. 1 ±2°          |  | APPD:                  |  | DWG NO.                            |  |
| XX. ±1°           |  | CHKD: Skila            |  | SIM CARD                           |  |
| DR: Kitty         |  |                        |  | SCALE SHEET REV                    |  |
|                   |  |                        |  | 1:1 1 OF 2 A                       |  |

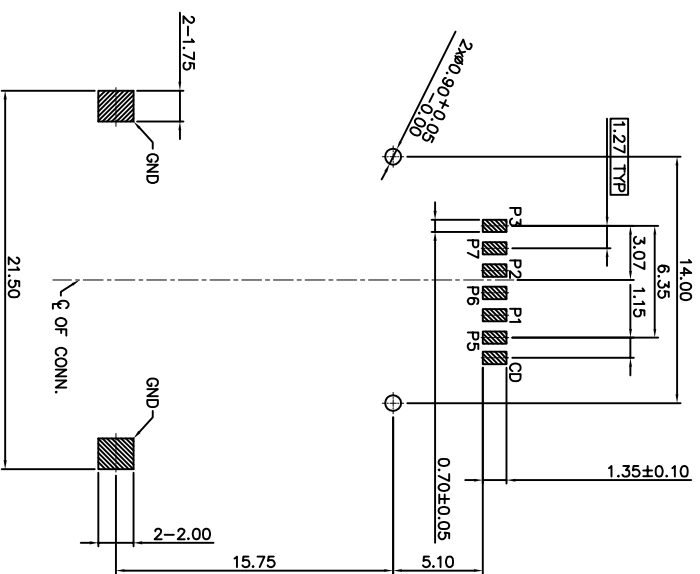


PIN ASSIGNMENTS

| Connector terminal NO. | Pin NO.                        |
|------------------------|--------------------------------|
| Pin 1                  | VCC: PWR signal and GND        |
| Pin 2                  | RST: Reset signal              |
| Pin 3                  | CLK: Clocking signal           |
| Pin 5                  | GND: PWR signal and GND        |
| Pin 6                  | VPP: programming Voltage       |
| Pin 7                  | I/O : serial date input/output |

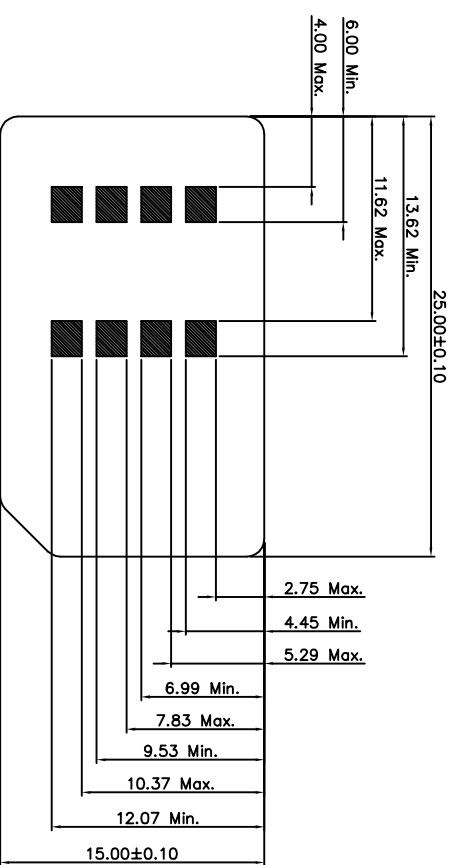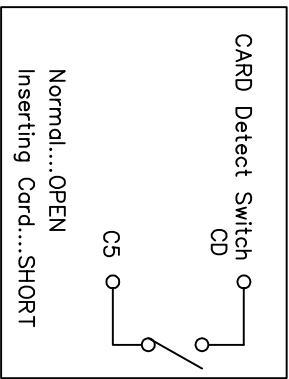

SIM CARD DIMENSION



| ITEM | PART NAME   | MATERIAL           | Q'TY  | REMARK          |
|------|-------------|--------------------|-------|-----------------|
| ①    | DUMMY CARD  | HIGH TEMP. PLASTIC | 1 PCS | With or without |
| ②    | CD TERMINAL | COPPER ALLOY       | 1 PCS |                 |
| ③    | SLIDER      | HIGH TEMP. PLASTIC | 1 PCS |                 |
| ④    | HOOK        | STAINLESS STEEL    | 1 PCS |                 |
| ⑤    | SPRING      | SWP                | 1 PCS |                 |
| ⑥    | SHELL       | STAINLESS STEEL    | 1 PCS |                 |
| ⑦    | TERMINAL    | COPPER ALLOY       | 6 PIN |                 |
| ⑧    | HOUSING     | HIGH TEMP. PLASTIC | 1 PCS |                 |

|                   |  |                        |  |                                    |  |
|-------------------|--|------------------------|--|------------------------------------|--|
| UNITS: mm         |  | <b>CSCONN</b>          |  | CSCONN PRECISE ELECTRONICS CO.,LTD |  |
| GENERAL TOLERANCE |  | PART NO.(INTENDED USE) |  | TITLE:                             |  |
| X. ° ±5°          |  | 0. X ±0. 25            |  | SIM CARD SOCKET 7P PUSH PUSH 1.95H |  |
| X. 1±2°           |  | 0. XX±0. 2             |  | DWG NO.                            |  |
| APPD:             |  | CHKD:                  |  | SIM CARD                           |  |
| X. ±1°            |  | 0. XXX±0. 1            |  | SCALE                              |  |
| DR:               |  | Kitty                  |  | SHEET                              |  |
|                   |  |                        |  | 2 OF 2                             |  |
|                   |  |                        |  | REV                                |  |
|                   |  |                        |  | A                                  |  |