

RECOMMENDED PCB LAYOUT(=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE=±0.05)

NOTES: 1.MATERIAL:

MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u”

Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.30±0.03mm
50u” NICKEL PLATING OVER ALL.
SHLD: SUS304-H,T=0.12±0.03mm

2.MECHANICAL:

INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES


3.ELECTRICAL:

CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.

VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

USB TYPE-C MALE-FEMURED INTERFACE THROUGH THE ASSUMERS

Pin Symbol Name	Description	Pin Symbol Name	Description
A1 (GND)	Ground return	B12 (GND)	Ground return
A2	Positive half of first SuperSpeed TX	B11 (SS0V)	SuperSpeed RX differential pair
A3	Negative half of first SuperSpeed TX	B10 (SS0V)	SuperSpeed RX differential pair
A4	First SuperSpeed TX differential pair	B9	First SuperSpeed TX differential pair
M4	This pin flows this power	B9	This pin flows this power
M6	Control channel	B8	Control channel
M6	Positive half of the first SuperSpeed TX differential pair (Position 1)	B7	Negative half of the first SuperSpeed TX differential pair (Position 1)
M7	Negative half of the first SuperSpeed TX differential pair (Position 1)	B6	Positive half of the first SuperSpeed TX differential pair (Position 2)
M8	Positive half of the first SuperSpeed TX differential pair (Position 1)	B5	Negative half of the first SuperSpeed TX differential pair (Position 2)
M8	Negative half of the first SuperSpeed TX differential pair (Position 1)	B5	Control channel
M9	This pin flows this power	B4	Control channel
M10	Negative half of second SuperSpeed TX differential pair	B3	Positive half of second SuperSpeed TX differential pair
M11	Positive half of second SuperSpeed TX differential pair	B2	Negative half of second SuperSpeed TX differential pair
M12	Ground return	B1	Ground return

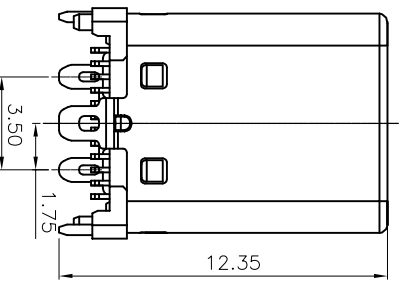

UNITS: mm

GENERAL TOLERANCE

X. ±5° 0. X±0.25
X.1±2° 0. XX±0.2
XX.±1° 0. XXX±0.1

CSCONN

PART NO.(INTENDED USE)
CUSM31241156004

CSCONN PRECISE ELECTRONICS CO.,LTD

TITLE: USB TYPE C MALE 24P 立贴

DWG NO. USB

SCALE SHEET REV



DR: Kit ty

1:1 1 OF 1 A

A

B

C

D

E

1 2 3 4 5 6 7 8